


Weights & Measures

Critical dimensions for all aquariums

| AQUARIUM SIZE | DIMENSIONS L X W X H* | EMPTY WEIGHT | FULL WEIGHT | TEMPERED BOTTOM |
|---------------|---|--------------|-------------|-----------------|
| 2½ Mini | 12 ³ / ₁₆ x 6 ¹ / ₈ x 8 ¹ / ₈ | 2.6 | 27 | No |
| 5½ | 16 ³ / ₁₆ x 8 ³ / ₈ x 10½ | 7 | 62 | No |
| 10 Leader | 20¼ x 10½ x 12 ⁹ / ₁₆ | 11 | 111 | No |
| 15 | 24¼ x 12½ x 12¾ | 21 | 170 | No |
| 20 High | 24¼ x 12½ x 16¾ | 25 | 225 | No |
| 20 Long | 30¼ x 12½ x 12¾ | 25 | 225 | No |
| 29 | 30¼ x 12½ x 18¾ | 40 | 330 | No |
| 30 | 36¼ x 12 ⁵ / ₈ x 16¾ | 43 | 343 | No |
| 30 Breeder | 36 ³ / ₁₆ x 18¼ x 12 ¹⁵ / ₁₆ | 48 | 348 | No |
| 33 Long | 48¼ x 12¾ x 13 ³ / ₈ | 46 | 382 | No |
| 37 | 30¼ x 12½ x 22¾ | 45 | 415 | Yes |
| 38 | 36¼ x 12 ⁵ / ₈ x 19¾ | 47 | 427 | Yes |
| 40 Breeder | 36 ³ / ₁₆ x 18¼ x 16 ¹⁵ / ₁₆ | 58 | 458 | No |
| 40 Long | 48¼ x 12¾ x 16 ⁷ / ₈ | 55 | 455 | Yes |
| 45 | 36¼ x 12 ⁵ / ₈ x 23¾ | 69 | 515 | Yes |
| 50 | 36 ³ / ₈ x 18 ³ / ₈ x 19 | 68 | 600 | Yes |
| 55 | 48¼ x 12¾ x 21 | 78 | 625 | Yes |
| 65 | 36 ³ / ₈ x 18 ³ / ₈ x 25 | 90 | 775 | Yes |
| 75E | 48½ x 18½ x 21½ | 98 | 785 | Yes |
| 90 | 48½ x 18½ x 25 ³ / ₈ | 135 | 1050 | Yes |
| 120 | 48½ x 24½ x 25½ | 191 | 1400 | Yes |
| 125 | 72½ x 18½ x 23 ³ / ₈ | 177 | 1400 | Yes |
| 150 | 72½ x 18½ x 29½ | 281 | 1800 | Yes |
| 180 | 72½ x 24½ x 25 ⁵ / ₈ | 282 | 2100 | Yes |
| 210 | 72½ x 24½ x 29 ⁵ / ₈ | 343 | 2450 | Yes |
| 36 Corner | 33 ⁷ / ₈ x 24 x 20 ⁷ / ₈ | 49 | 409 | Yes |
| 54 Corner | 39 x 27¼ x 23 | 84 | 650 | Yes |
| 92 Corner | 48½ x 34¼ x 25½ | 131 | 1050 | Yes |

*How the aquarium is measured:

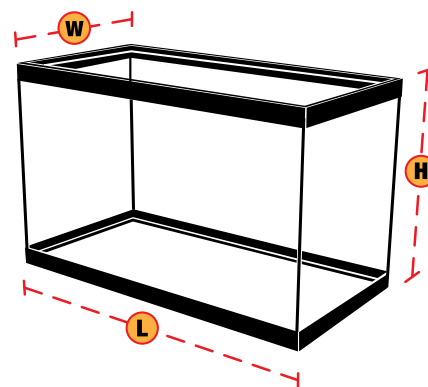

Technical information

Use this information to plan what size aquarium fits your needs and space. For safety reasons, and to fulfill warranty requirements, it is essential to place your aquarium on an appropriately-sized Aqueon aquarium stand, which will meet all weight and safety specifications. Also, please note that tempered-bottom aquariums are exceptionally strong but cannot be drilled. (See page 8 for pre-drilled aquariums.)

Critical dimensions for all aquariums (continued)

| AQUARIUM SIZE | DIMENSIONS L X W X H* | EMPTY WEIGHT | FULL WEIGHT | TEMPERED BOTTOM |
|---------------|---|--------------|-------------|-----------------|
| 95 Wave | 48 ³ / ₈ x 24 ³ / ₈ x 25 ¹ / ₄ | 150 | 1100 | Yes |
| Mini Bow 1 | 8 ³ / ₈ x 6 x 11 ¹ / ₄ | 1.75 | 10 | No |
| Mini Bow 2.5 | 14 ¹ / ₈ x 7 ³ / ₄ x 11 ³ / ₈ | 4 | 25 | No |
| Mini Bow 5 | 14 ³ / ₄ x 9 ¹ / ₂ x 15 ¹ / ₈ | 5 | 55 | No |
| 16 Bow | 20 ¹ / ₄ x 12 ⁷ / ₈ x 17 ³ / ₄ | 20 | 180 | Yes |
| 26 Bow | 24 ¹ / ₈ x 14 ³ / ₄ x 20 ⁷ / ₈ | 34 | 294 | Yes |
| 36 Bow | 30 ¹ / ₄ x 15 ¹ / ₂ x 20 ⁷ / ₈ | 41 | 341 | Yes |
| 46 Bow | 36 ³ / ₈ x 16 ³ / ₈ x 20 ⁷ / ₈ | 53 | 550 | Yes |
| 72 Bow | 48 ³ / ₈ x 18 x 23 | 91 | 800 | Yes |
| 155 Bow | 72 ³ / ₈ x 24 ¹ / ₂ x 25 ¹ / ₂ | 253 | 1800 | Yes |
| 20X | 20 ¹ / ₄ x 10 ¹ / ₂ x 23 ³ / ₄ | 32 | 232 | No |
| 30X | 24 ¹ / ₄ x 12 ¹ / ₂ x 24 ³ / ₄ | 41 | 340 | No |
| 110X | 48 ¹ / ₂ x 18 ¹ / ₂ x 29 ¹ / ₂ | 203 | 1320 | Yes |
| 10 Hexagon | 14 ¹ / ₂ x 12 ⁹ / ₁₆ x 18 ³ / ₈ | 12 | 110 | No |
| 20 Hexagon | 18 ³ / ₄ x 16 ¹ / ₄ x 20 ⁵ / ₈ | 23 | 220 | Yes |
| 35 Hexagon | 23 ¹ / ₄ x 20 ³ / ₁₆ x 24 ³ / ₄ | 43 | 390 | Yes |

Aqueon heater requirements

Based on standard room temperature of 68°-72°.

| AQUARIUM SIZE | TO INCREASE ABOVE ROOM TEMPERATURE: | | |
|---------------|-------------------------------------|----------|----------|
| | 5° F | 10° F | 15° F |
| 5 Gallon | 50 watt | 50 watt | 50 watt |
| 10 Gallon | 50 watt | 50 watt | 100 watt |
| 20 Gallon | 50 watt | 100 watt | 100 watt |
| 30 Gallon | 100 watt | 100 watt | 150 watt |
| 55 Gallon | 150 watt | 150 watt | 200 watt |
| 75 Gallon | 200 watt | 200 watt | 300 watt |
| 90 Gallon | 300 watt | 300 watt | 300 watt |

Warranty Information*


| AQUEON PRODUCT | SIZES COVERED | WARRANTY LENGTH |
|--------------------------------|----------------|----------------------|
| Aquariums - Glass | 14 and Smaller | 90 Days |
| Aquariums - Glass | 15 – 55 | 5 Years |
| Aquariums - Glass | 65 and Larger | Lifetime |
| Aquariums - Acrylic (Mini Bow) | All | 90 Days |
| Aquarium Furniture - Stands | All | 1 Year |
| Aquarium Furniture - Canopies | All | 1 Year |
| Power Filters | All | Lifetime |
| MegaFlow Sumps | All | Lifetime |
| Submersible Heaters | All | Lifetime |
| Water Changers | All | Lifetime |
| Lighting | All | 1 Year |
| Foods | All | Money-Back Guarantee |
| Water Care Products | All | Money-Back Guarantee |

*All Aqueon product warranties are subject to limitations and exclusions. Please see product packaging or included instructions for details. For further questions or details, download product warranty information at aqueonproducts.com or call an Aqueon customer service representative at 888.255.4527.

Power Cord Drip Loop

Since some of your aquarium equipment requires electricity to operate, your aquarium should be placed within close proximity to an electrical outlet.

One of the best and simplest tools that will enforce the separation of water and electricity is the “drip loop.” The drip loop is formed by ensuring that the power cords leading into the outlet approach the outlet from underneath the plug socket. If water drips down a power cord, it will fall off at the upward bend in the cord, never making it to the electrical outlet.

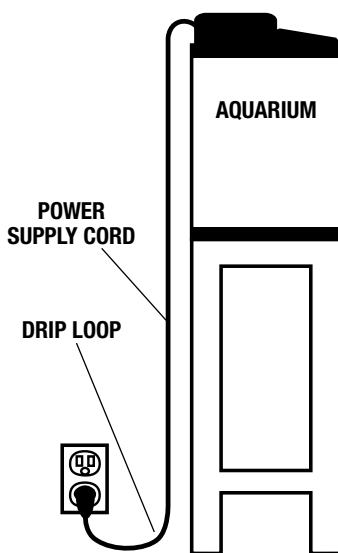

Quick Tips

Location:

- Do NOT place your aquarium near a window or door.
- Do NOT place your aquarium where it will receive drafts or direct sunlight.
- Make sure your aquarium is level and placed on an Aqueon aquarium stand near an electrical outlet.

Decorating:

- Choose a substrate (gravel) suited to the type of fish you will be keeping.
- Rinse the substrate thoroughly before adding to the aquarium.
- Place appropriate décor in the aquarium.

Adding Water:

- Being careful not to disrupt the substrate and placed décor, fill the aquarium with water.
- Add necessary water conditioners to dechlorinate or treat the water.
- Test the water's pH. Adjust as needed.

Filtration:

- Position your Aqueon power filter on the back of the aquarium.
- Install the filter cartridge in the filter.
- After the aquarium has been filled with water, plug in the filter to start it.

Temperature:

- Position your Aqueon heater on the back wall of the aquarium.
- Use suction cups to secure the heater on the aquarium wall near good water circulation.
- The heater can be fully submersed in the water.

Lighting:

- Place hood and strip light on top of the aquarium; plug in and turn on.

The Nitrogen Cycle:

- Fish waste buildup will make water unsuitable for fish, so test the water regularly.
- Your Aqueon filter, frequent water changes and some simple routine maintenance will keep fish happy and healthy.

Adding Fish:

- Decide what fish you'd like in your aquarium. It's best to start with hardier species.
- Acclimate your fish before releasing them.
- Add fish gradually over the course of a few months to get to the desired amount. Do not add all at once.

Maintenance:

- Perform regular partial water changes.
- Replace the filter cartridge monthly.
- Test your water regularly.

Food the Way Fish Like It... Naturally

Fish food should be made
from the foods fish eat.
Like whole fish, krill, kelp...
the natural stuff.

That's the way we make it.
That's the way fish like it.

